



We provide our customers with exceptional PRODUCTS in accordance with the highest international standards and also provide SERVICES that meets our customers' needs or exceeds their expectations.

Powered by: **PROLINK**

Discription


ProLink F/O JUMPER CORD ,SC -LC-MM DUPLEX - OM3 20M

Features

-  Small Size, High Precision.
-  Zirconia 1.25mm ceramics ferrule.
-  Low insertion Loss.
-  High Return Loss.
-  Duplex are Available.

Applications

-  Telecom and Datacom Equipment.
-  LAN\WAN
-  Device Terminals

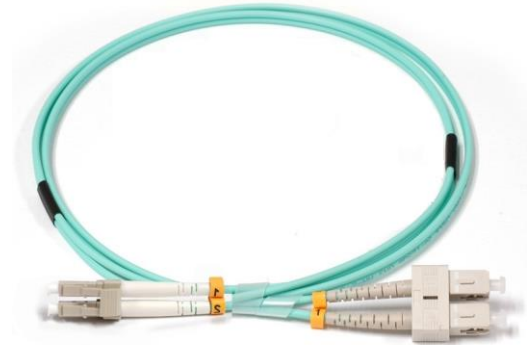

Speciations

Connectors type	SC-LC
Cable	OM3 Duplex 20M
Fiber Type	OM3 50/125
Cable Color	Aqua
insertion loss	≤0.25 dB
return loss	≥30dB
joint endurance	> 1000Times
Operating Temperature	-40℃~+70℃
Storage Temperature	-25℃~+60℃
ROHS	Meet 2002/95/EC Requirement