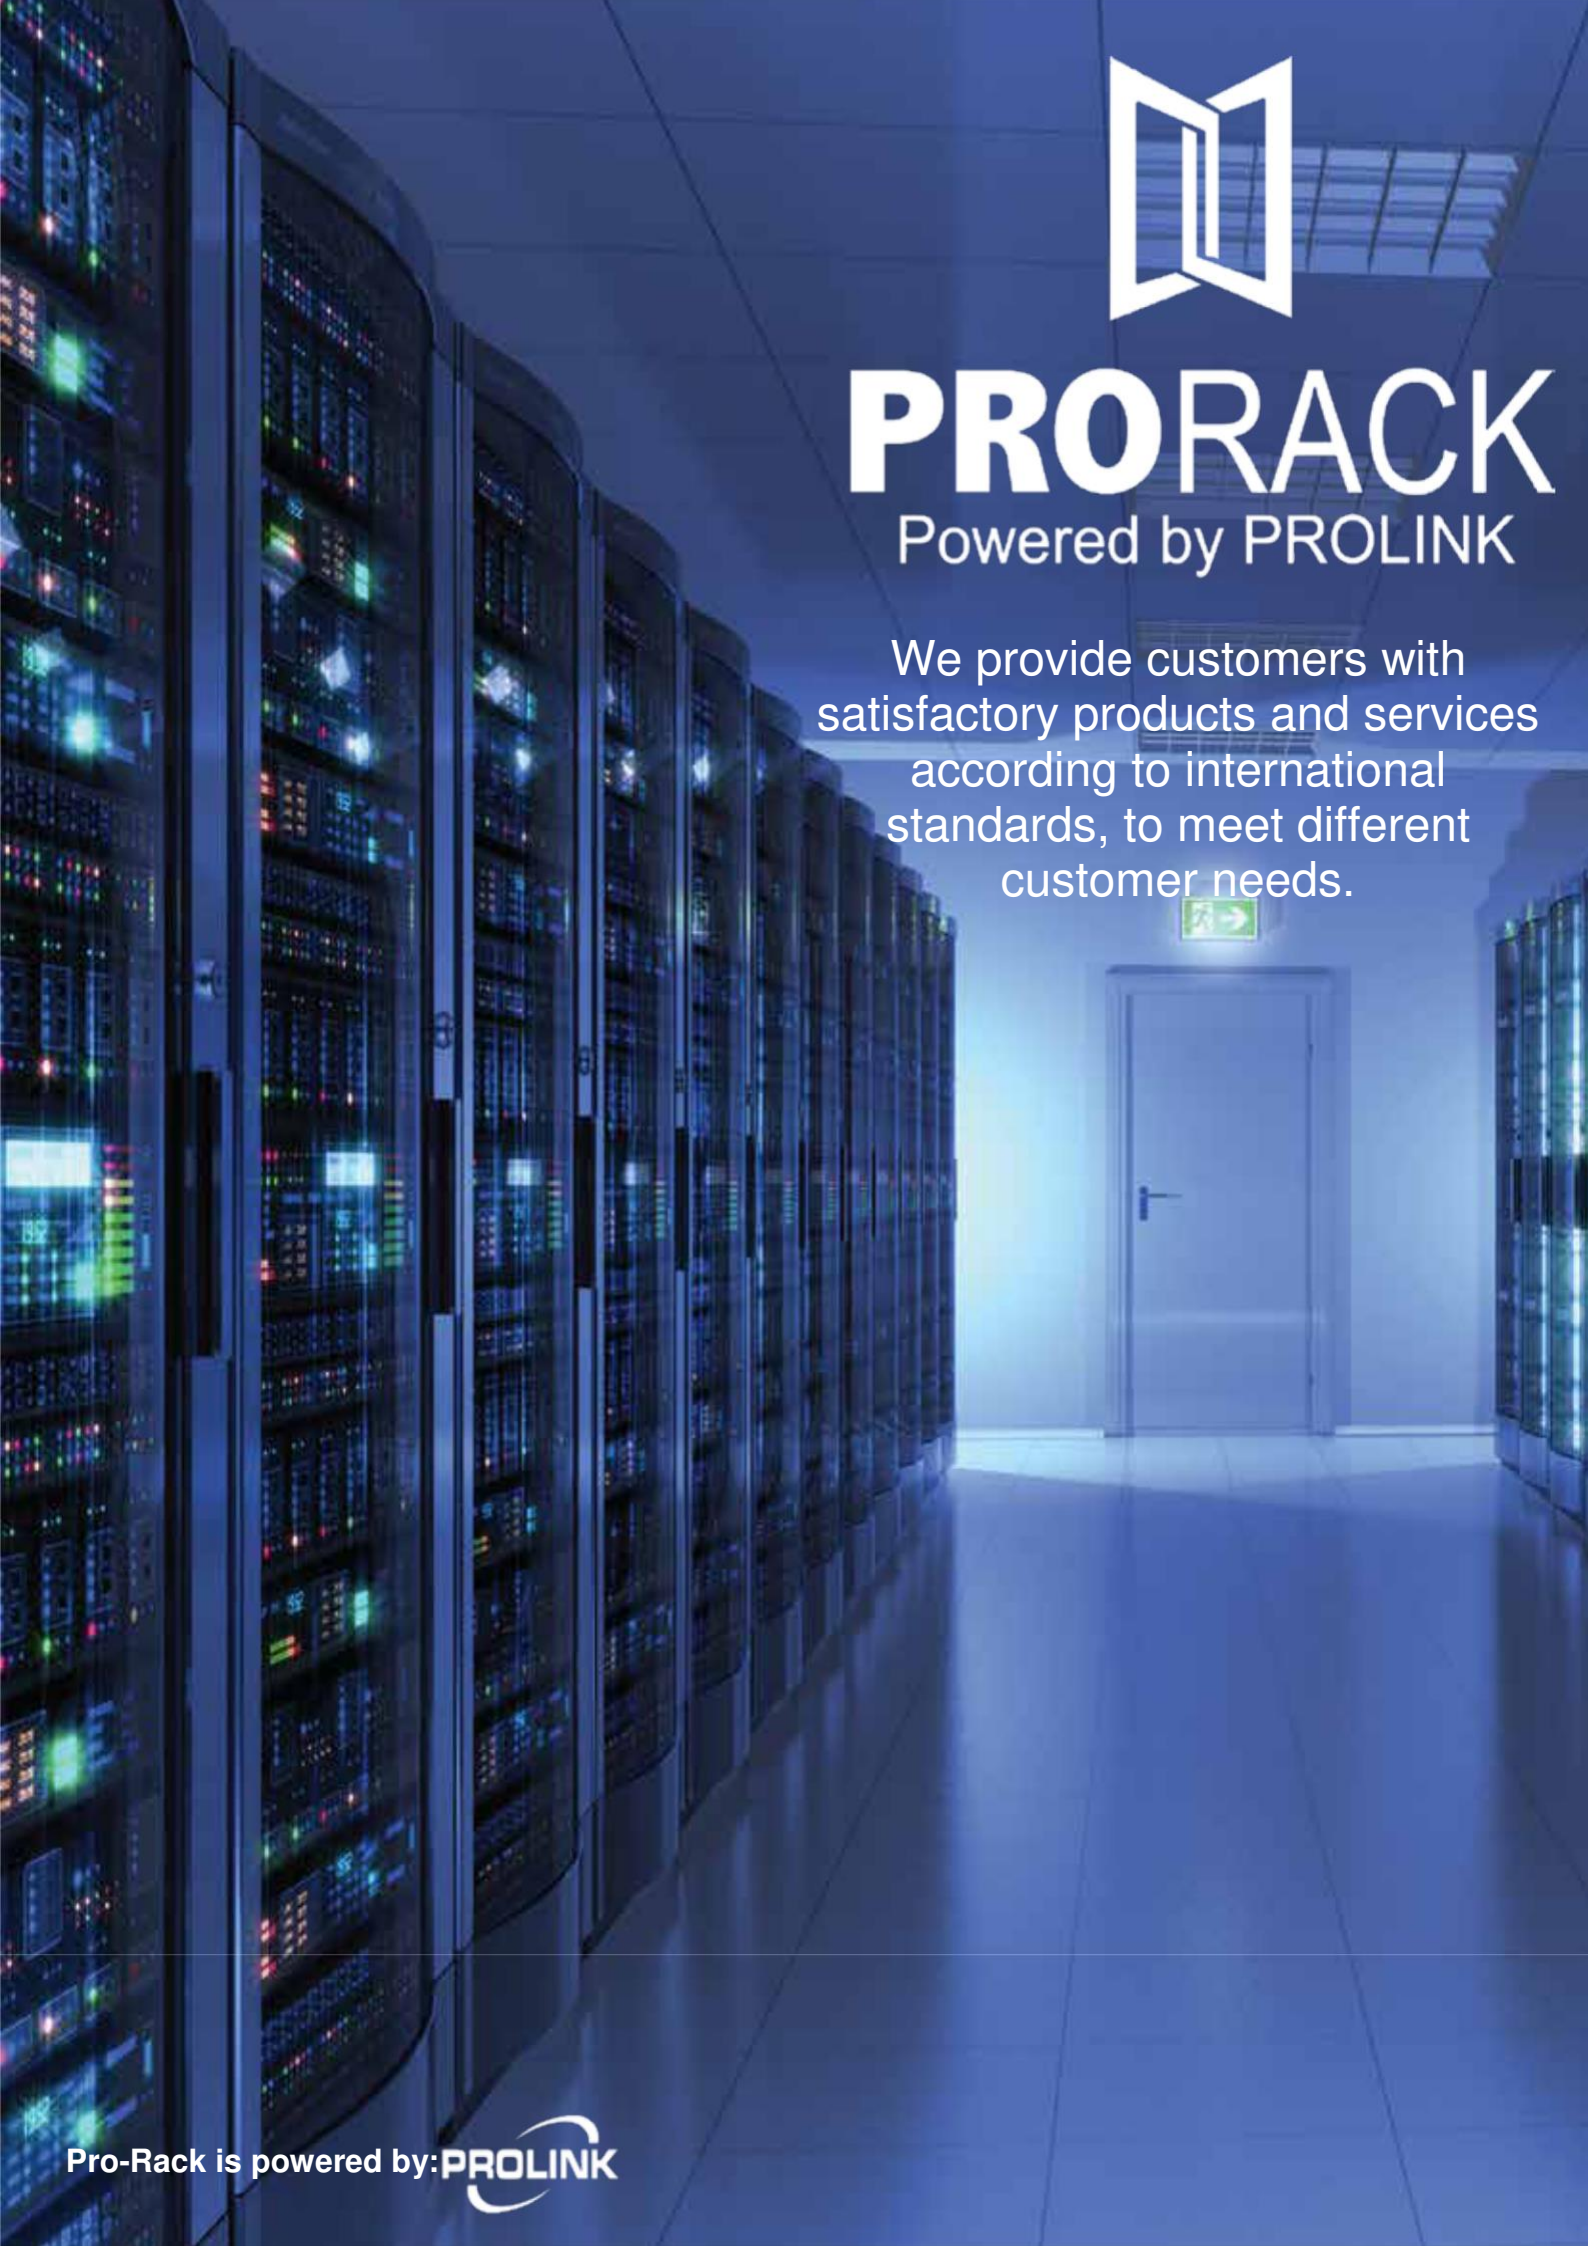
PRORACK
Powered by PROLINK
We provide customers with satisfactory products and services according to international standards, to meet different customer needs.
Pro-Rack is powered by: PROLINK

Dummy panel:

19” 1U Panel

Features:

- Materials: 1.2 mm cold-rolled steel
- Load capacity: 35 Kg
- Installation method: Cage nuts and screws
- Mounting position: Between two profile rails
- Application: Vertically fixed on profile rails
- Features: Easy installation
- Surface treatment: Degreasing, phosphating, powder coating